

Technical Data Sheet

Product:

Self-Adhesive Kraft Paper Hot Melt

Typical Applications:

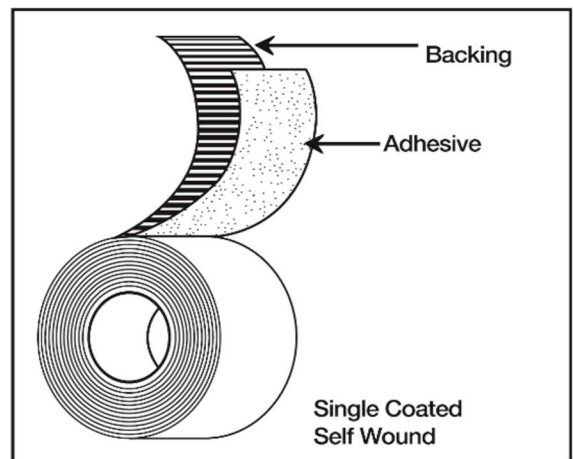
- Carton Sealing Tape
- Hand & Automatic application
- Good at elevated temperatures

Advantages & Benefits:

- Excellent adhesion
- High initial tack
- Solvent free adhesive
- Tear easily by hand

Construction:

- Kraft Paper Backing
- Clear Synthetic rubber (Hot Melt) adhesive
- Available Printed & unprinted up to 4 colours
- Widths available – 12mm - 144mm*
- Lengths available – 50m – 500m*
- Paper colours

CONSTRUCTION


*Lead times may vary depending on number of colours printed. Minimum order quantities apply

Brown

White

Technical Data

<i>Measure</i>	<i>Unit</i>	<i>Result & Tolerance</i>
Backing thickness	Microns	90 +/- 5%
Adhesive thickness	Microns	20 +/- 5%
Total thickness	Microns	110 +/- 5%
Peel adhesion (Afera 5001)	Newtons/25mm	8 +/- 5%
Elongation (Afera 5004)	%	<5
Tensile Strength (Afera 5004)	Newtons/cm	45 +/- 5%

Additional information

Tape performance is guaranteed for the first 6 months. Product must be stored at ambient temperature (Between 18c-23c), in its original box and in a dry atmosphere away from direct sunlight. For product traceability, please advise the batch identification number printed on the box. For optimum performance stock should be rotated and used within 12 months. The tapes have adhesive that are pressure sensitive so must be properly applied to ensure the best performance.

Physical and performance characteristics shown above are obtained following tests recommended by AFERA and PSTC. The values given are typical values and do not constitute a specification. The user should determine whether the tape is suitable for the intended application.